

Features

FS Value Series batteries are:

- Engineered to deliver highest value possible with consistent, dependable power meeting rated capacities
- 3-5 year service life in normal standby applications at consistent 25° C temperatures
- Valve Regulated Lead Acid (VRLA), Absorbent Glass Mat (AGM) Technology – Safe operation in any position
- Lead-calcium alloy grids and the use of high purity virgin lead
- Externally sealed Flame retardant ABS case and cover to UL94-HB specifications
- UL recognized (UR) as a component in UL approved equipment installations under File number MH61846
- Classified as non-spillable status for transportation making it non-hazardous for normal transportation processes. Approved for transport by air. Fulfills US D.O.T., I.A.T.A., F.A.A., C.A.B. handling and shipping requirements
- For more details on special design and construction details see Features and Benefits publication on www.oraclebattery.com




Specification


Cell per unit	6	Ambient Temperature
Nominal Voltage (V)	12	Charge 0°C (32°F) to 40°C (104°F)
Nominal Capacity (Ah)	8Ah @ 20 hour rate to 1.75vpc	Discharge -15°C (5°F) to 50°C (122°F)
Weight	Approx. 2.29kg (5.04Lbs.)	Storage -15°C (5°F) to 40°C (104°F)
Internal Resistance (1KHz)	25mΩ	Max Charge Current
Max Discharge Current (5s)	100A	Max charge current 2.4A
Battery Life	Stand by : 3~5 years	Cycle use: Charge voltage: 14.4 to 15.0V
Terminal Type	F1	Stand by: Charge voltage: 13.5 to 13.8V
Container Material	ABS 94-HB flame retardant case (94V-0 Optional)	



Dimensions

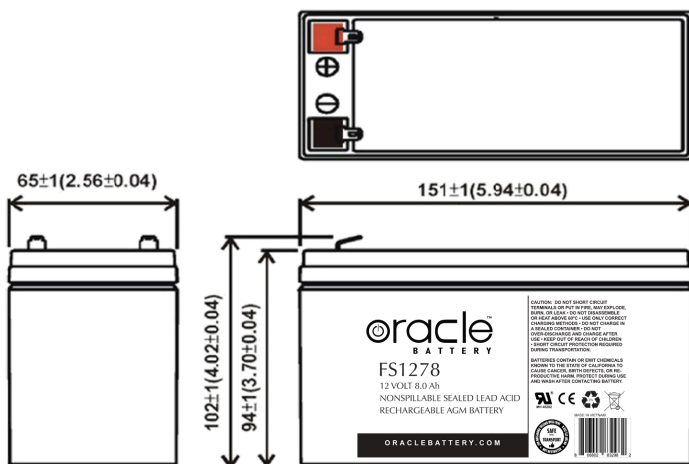


	Length	Width	Height	Total Height
Unit mm	151±1	65±1	94±1	100±1
Unit inch	5.94±0.04	2.56±0.04	3.70±0.04	3.94±0.04

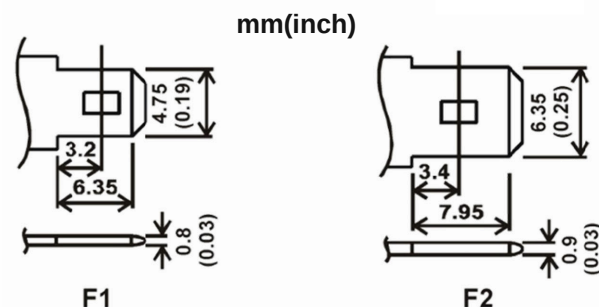


Speak to our Sales Team about which terminal options are in stock today

Terminal Voltage

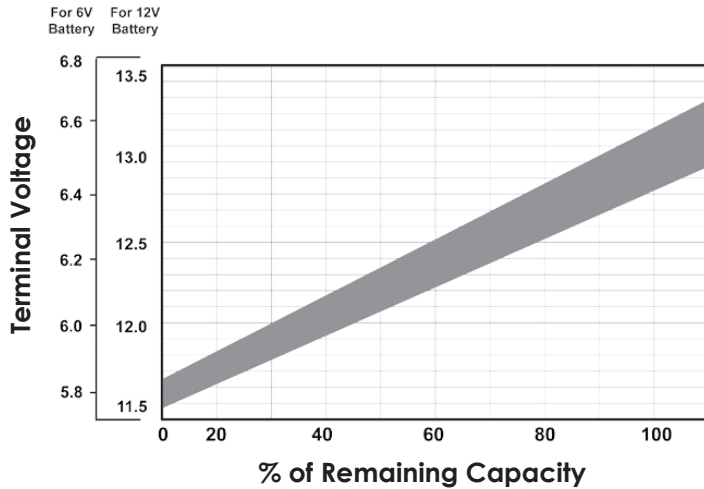

Discharge Times

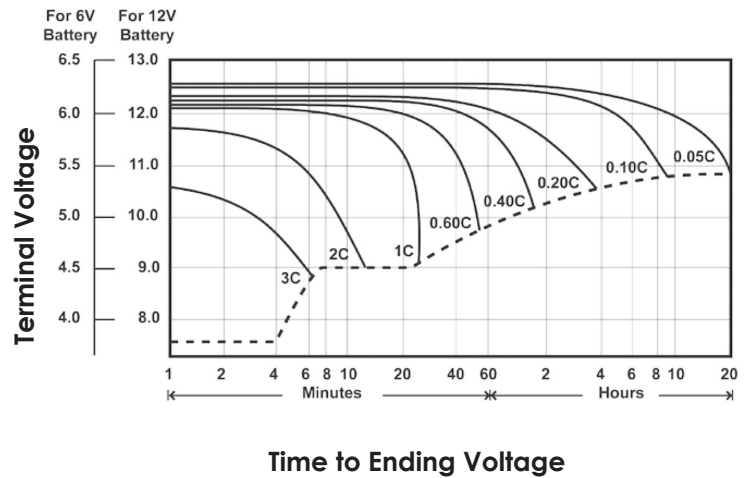

Charge Voltages

Temperature Compensated Charging	Average Temperature	Cycle Charging Volts Per Cell	Float Charging Volts Per Cell
	-40°C (-40°F)	2.85-2.95	2.38-2.43
	-20°C (-4°F)	2.67-2.77	2.34-2.39
	-10°C (14°F)	2.61-2.71	2.32-2.37
	0°C (32°F)	2.55-2.65	2.30-2.35
	10°C (50°F)	2.49-2.59	2.28-2.33
	20°C (68°F)	2.43-2.53	2.26-2.31
	25°C (77°F)	2.40-2.50	2.25-2.30
	30°C (86°F)	2.37-2.47	2.24-2.29
	40°C (104°F)	2.31-2.41	2.22-2.27
	50°C (122°F)	2.25-2.35	2.20-2.25

Temperature Storage

Average Storage Temperature	Recharging Interval
68°F	Every 9 months
77°F	Every 6 months
95°F	Every 3 months

Constant Current Discharge Characteristics (25°C 77°F)

F.V/Time	5MIN	10MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	10HR	20HR
1.60V	30.0	18.6	14.4	8.40	5.20	2.81	2.03	1.38	0.75	0.410
1.67V	29.0	17.4	14.0	8.20	5.07	2.80	2.02	1.37	0.75	0.410
1.70V	28.0	17.1	13.8	8.03	4.99	2.78	2.00	1.36	0.74	0.400
1.75V	27.6	16.6	13.4	7.81	4.84	2.76	1.98	1.35	0.74	0.400
1.80V	26.5	16.0	13.1	7.55	4.76	2.74	1.96	1.34	0.72	0.400