

### Features

#### DC Extreme Cycling Series:



- Designed for long life in high cycling applications where battery is required to discharge or power and operate the application on a routine basis.
- Proprietary precious metal additives are blended into the grid materials and refined (4BS) active material to optimize the structure increasing cycle-life, and reducing internal resistance. This makes the batteries cycle longer and charge better and faster, while extending overall life.
- 7-10 year service life in standby applications at 25° C temperatures.
- Cycles over 500 times at 60% depth of discharge yet will perform equally well in standby and other applications where both conditions are required.
- Valve Regulated Lead Acid (VRLA), Absorbent Glass Mat (AGM) Technology – Safe operation in any position
- Lead-calcium alloy grids and the use of 99.9% high purity virgin lead
- Externally sealed Flame retardant ABS case and cover to UL94-HB specifications
- UL recognized (UR) as a component in UL approved equipment installations under File number MH 61846
- Classified as non-spillable status for transportation making it non-hazardous for normal transportation processes. Approved for transport by air. Fulfills US D.O.T., I.A.T.A., F.A.A., C.A.B. handling and shipping requirements
- For more on special design and construction details see Features and Benefits publication on [www.oraclebattery.com](http://www.oraclebattery.com)




<b>Cell per unit</b>	6	<b>Ambient Temperature</b>
<b>Nominal Voltage (V)</b>	12	Charge 0°C (32°F) to 40°C (104°F)
<b>Nominal Capacity (Ah)</b>	100Ah @ 20 hour rate to 1.75vpc	Discharge -15°C (5°F) to 50°C (122°F)
<b>Weight</b>	Approx 28.5kg (62.8lbs)	Storage -15°C (5°F) to 40°C (104°F)
<b>Internal Resistance (1KHz)</b>	≤5mΩ	<b>Max Charge Current</b>
<b>Max Discharge Current (5s)</b>	800A (5s)	Max charge current 30A
<b>Battery Life</b>	Stand by : 7~10 years	<b>Cycle use:</b> Charge voltage: 14.4 to 15.0V
<b>Terminal Type</b>	M6 Insert Terminal	<b>Stand by:</b> Charge voltage: 13.5 to 13.8V
<b>Container Material</b>	ABS 94-HB flame retardant case	




	Length	Width	Height	Total Height
Unit mm	306±2	169±2	211±2	215±1
Unit inch	12.05±0.04	6.61±0.04	8.19±0.04	9.17±0.04

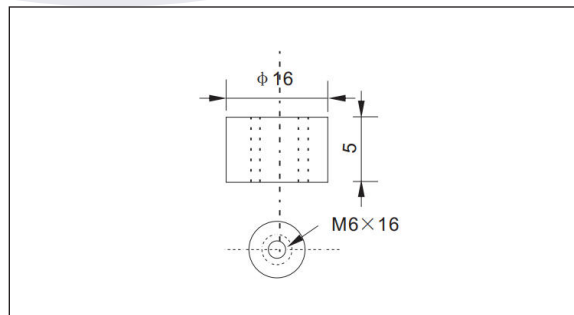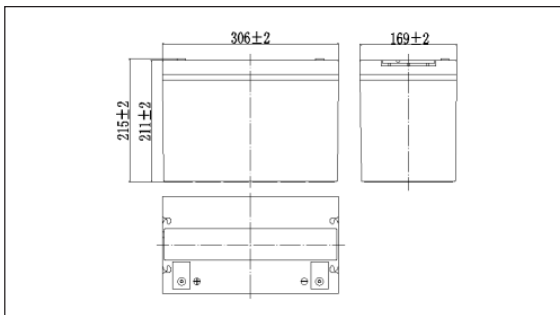

## Terminal Voltage

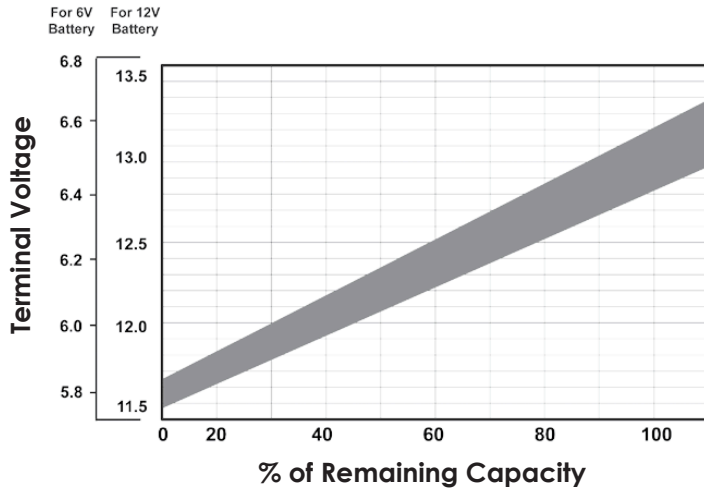

## Discharge Times

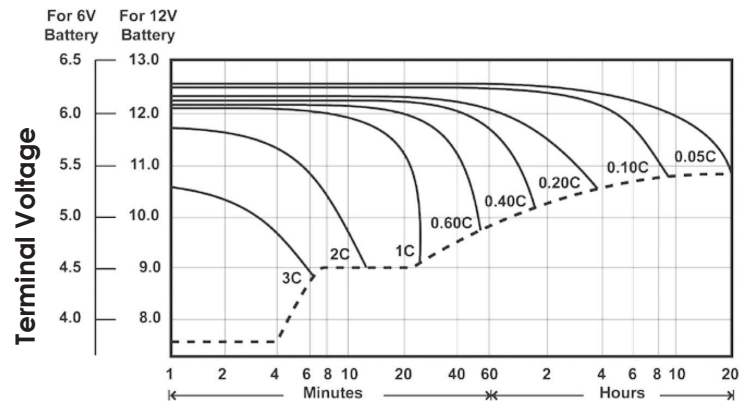


## Charge Voltages

Average Temperature	Cycle Charging Volts Per Cell	Float Charging Volts Per Cell
-40°C (-40°F)	2.85-2.95	2.38-2.43
-20°C (-4°F)	2.67-2.77	2.34-2.39
-10°C (14°F)	2.61-2.71	2.32-2.37
0°C (32°F)	2.55-2.65	2.30-2.35
10°C (50°F)	2.49-2.59	2.28-2.33
20°C (68°F)	2.43-2.53	2.26-2.31
25°C (77°F)	2.40-2.50	2.25-2.30
30°C (86°F)	2.37-2.47	2.24-2.29
40°C (104°F)	2.31-2.41	2.22-2.27
50°C (122°F)	2.25-2.35	2.20-2.25

## Temperature Storage

Average Storage Temperature	Recharging Interval
68°F	Every 9 months
77°F	Every 6 months
95°F	Every 3 months

## Cycle Life

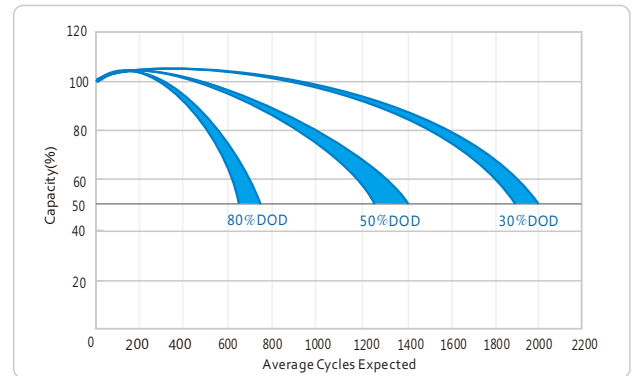

## Constant Current Discharge Characteristics (Unit:Ah) (25°C 77°F)

F.V/Time	10MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	207	160	95.5	58.7	34.7	25.0	17.1	11.7	9.67	5.13
1.65V	201	156	93.6	57.8	34.5	24.9	17.0	11.7	9.65	5.12
1.70V	193	150	90.7	56.4	34.2	24.7	16.8	11.6	9.62	5.10
1.75V	184	145	88.5	54.6	33.7	24.5	16.7	11.5	9.57	5.07
1.80V	174	137	85.3	52.8	32.8	23.8	16.2	11.2	9.50	5.04