

Features


HR High Rate Discharge Series:

- Excellent high-rate discharge characteristics that ensure reliable performance in UPS and other high-rate discharge applications for up to 10 years service life at 25° C temperatures.
- Interior design performance attributes to ensure cell to cell consistency and high wattage per cell performances.
- Valve Regulated Lead Acid (VRLA), Absorbent Glass Mat (AGM) Technology – Safe operation in any position
- Lead-calcium alloy grids and the use of high purity virgin lead
- Externally sealed Flame retardant ABS case and cover to UL94V-0 for superior performance on sizes over 33Ah is standard (under 33Ah is optional)
- Special high performance terminals designed to increase conductance.
- UL recognized (UR) as a component in UL approved equipment installations under File number MH61846
- Classified as non-spillable status for transportation making it non-hazardous for normal transportation processes. Approved for transport by air. Fulfills US D.O.T., I.A.T.A., F.A.A., C.A.B. handling and shipping requirements
- For more details on special design and construction details see Features and Benefits publication on www.oraclebattery.com





Specification

Cell per unit	6	Ambient Temperature
Nominal Voltage (V)	12	Charge 0°C (32°F) to 40°C (104°F)
Nominal Capacity (watts)	210W/cell @ 15mins rate to 1.6vpc	Discharge -15°C (5°F) to 50°C (122°F)
Weight	Approx 17.3kg (38.1 lbs.)±3%	Storage -15°C (5°F) to 40°C (104°F)
Internal Resistance (1KHz)	6.5mΩ	Max Charge Current
Max Discharge Current (5s)	300A	Max charge current 18A
Battery Life	Stand by : 10 years	Cycle use: Charge voltage: 14.4 to 15.0V
Terminal Type	NB(F14)/IT(F8)	Stand by: Charge voltage: 13.5 to 13.8V
Container Material	ABS 94-HB flame retardant case (94V-0 Optional)	

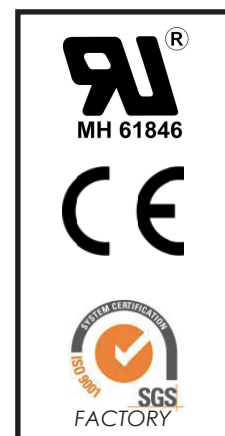


Dimensions

	Length	Width	Height	Total Height
Unit mm	229±1	138±1	205±1	210±1
Unit inch	9.02±0.04	5.43±0.04	8.07±0.04	8.27±0.04

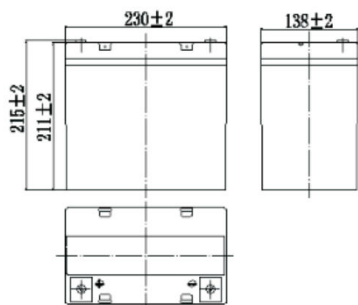


Speak to your sales representative about terminal options available

Terminal Voltage

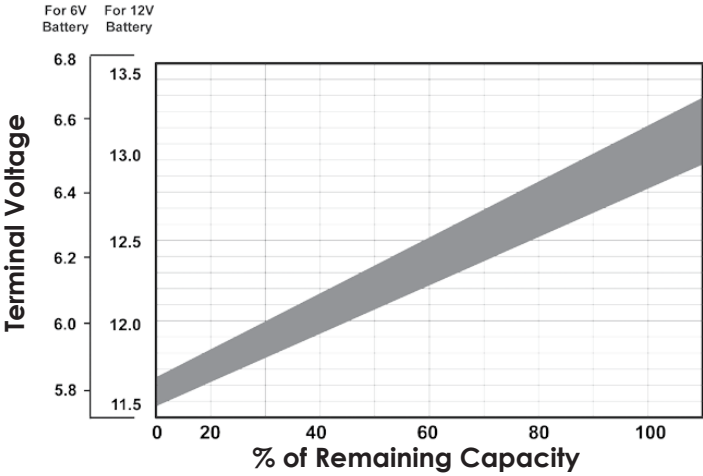

Discharge Times

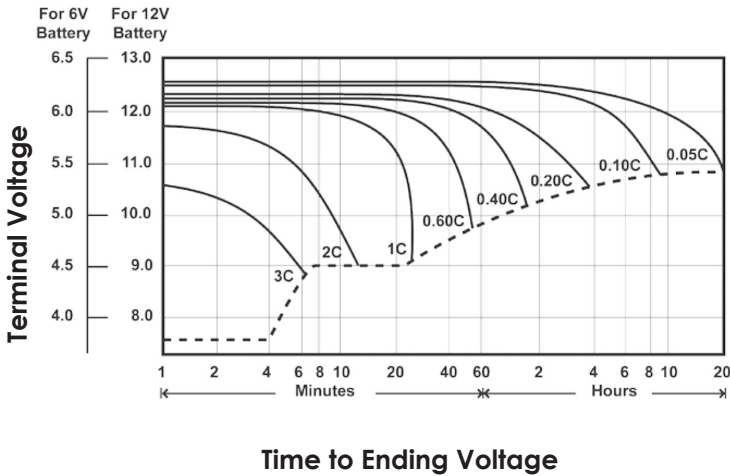

Charge Voltages

Temperature Compensated Charging	Average Temperature	Cycle Charging Volts Per Cell	Float Charging Volts Per Cell
	-40°C (-40°F)	2.85-2.95	2.38-2.43
	-20°C (-4°F)	2.67-2.77	2.34-2.39
	-10°C (14°F)	2.61-2.71	2.32-2.37
	0°C (32°F)	2.55-2.65	2.30-2.35
	10°C (50°F)	2.49-2.59	2.28-2.33
	20°C (68°F)	2.43-2.53	2.26-2.31
	25°C (77°F)	2.40-2.50	2.25-2.30
	30°C (86°F)	2.37-2.47	2.24-2.29
	40°C (104°F)	2.31-2.41	2.22-2.27
	50°C (122°F)	2.25-2.35	2.20-2.25

Temperature Storage

Average Storage Temperature	Recharging Interval
68°F	Every 9 months
77°F	Every 6 months
95°F	Every 3 months

Constant Current Discharge Characteristics (25°C 77°F)

F.V/Time	5MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	220.0	110.0	67.0	38.0	21.5	16.30	11.50	6.82	5.79	3.25
1.67V	202.0	107.0	63.0	38.1	21.4	16.20	11.30	6.75	5.73	3.24
1.70V	190.0	102.5	62.5	37.8	21.3	16.10	11.20	6.65	5.61	3.20
1.75V	175.0	99.0	61.6	37.0	20.5	15.60	11.00	6.56	5.56	3.10
1.80V	142.0	95.0	58.7	25.7	20.3	14.70	10.70	6.45	5.50	3.08

Watts Per Cell Discharge Characteristics (25°C 77°F)

F.V/Time	5MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	397	222	117	74	41.3	32.0	22.0	13.7	11.5	6.0
1.67V	362	220	115	74	41.0	31.7	21.8	13.5	11.5	6.0
1.70V	343	200	114	74	40.7	31.0	21.7	13.3	11.5	6.0
1.75V	317	193	110	72	40.0	30.2	21.5	13.2	11.4	6.0
1.80V	260	181	103	72	38.8	29.2	21.2	13.0	11.2	5.9



HR12205W 12V 60Ah
Sealed Lead Acid AGM Battery