

Features

Heavy Duty Multi-Purpose Series:

- Provides extended life in applications where variety and combination of general cycling, standby, and wider temperature fluctuation environments.
- 5 year service life in standby applications at 25° C temperatures.
- Cycles over 300 times at 60% depth of discharge yet will perform equally well in standby and other applications where both conditions are required.
- Valve Regulated Lead Acid (VRLA), Absorbent Glass Mat (AGM) Technology – Safe operation in any position
- Lead-calcium alloy grids and the use of high purity virgin lead
- Externally sealed Flame retardant ABS case and cover to UL94-HB specifications
- UL recognized (UR) as a component in UL approved equipment installations under File number MH61846
- Classified as non-spillable status for transportation making it non-hazardous for normal transportation processes. Approved for transport by air. Fulfills US D.O.T., I.A.T.A., F.A.A., C.A.B. handling and shipping requirements
- For more details on special design and construction details see Features and Benefits publication on www.oraclebattery.com



*NB Terminals shown - stocked version




Specification

Cell per unit	6	Ambient Temperature
Nominal Voltage (V)	12	Charge 0°C (32°F) to 40°C (104°F)
Nominal Capacity (Ah)	48Ah @ 20 hour rate to 1.75vpc	Discharge -15°C (5°F) to 50°C (122°F)
Weight	Approx 14.5kg (31.96lbs.)	Storage -15°C (5°F) to 40°C (104°F)
Internal Resistance (1KHz)	9mΩ	Max Charge Current
Max Discharge Current (5s)	540A (5s)	Max charge current 13.5A
Battery Life	Stand by : 3~5 years	Cycle use: Charge voltage: 14.4 to 15.0V
Terminal Type	NB(F4)* (IT(F8) available upon special order)	Stand by: Charge voltage: 13.50 to 13.80V
Container Material	ABS 94-HB flame retardant case (94V-0 Optional)	




Dimensions



197±1(7.75±0.04)




165±1(6.49±0.04)



	Length	Width	Height	Total Height
Unit mm	197±1	165±1	170±1	170±1
Unit inch	7.75±0.04	6.49±0.04	6.69±0.04	6.69±0.04




F8
Insert Terminal
Not Stocked

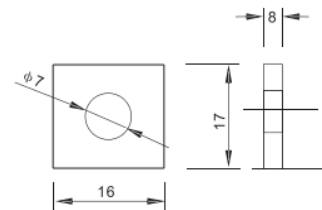


T5 terminal with M6 Nut and Bolt hardware
(Stocked option)

Terminal Voltage

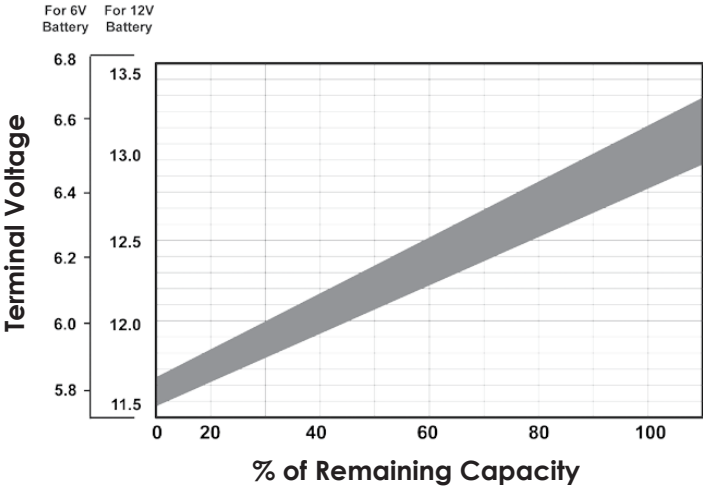

Discharge Times

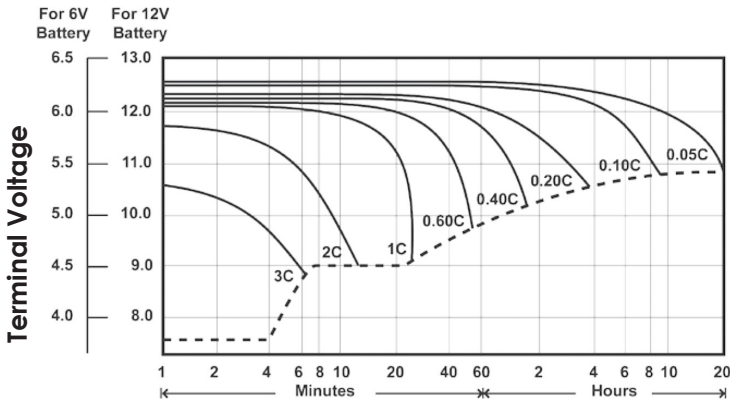


Charge Voltages

Temperature Compensated Charging	Average Temperature	Cycle Charging Volts Per Cell	Float Charging Volts Per Cell
	-40°C (-40°F)	2.85-2.95	2.38-2.43
	-20°C (-4°F)	2.67-2.77	2.34-2.39
	-10°C (14°F)	2.61-2.71	2.32-2.37
	0°C (32°F)	2.55-2.65	2.30-2.35
	10°C (50°F)	2.49-2.59	2.28-2.33
	20°C (68°F)	2.43-2.53	2.26-2.31
	25°C (77°F)	2.40-2.50	2.25-2.30
	30°C (86°F)	2.37-2.47	2.24-2.29
	40°C (104°F)	2.31-2.41	2.22-2.27
	50°C (122°F)	2.25-2.35	2.20-2.25

Temperature Storage

Average Storage Temperature	Recharging Interval
68°F	Every 9 months
77°F	Every 6 months
95°F	Every 3 months

Cycle Life

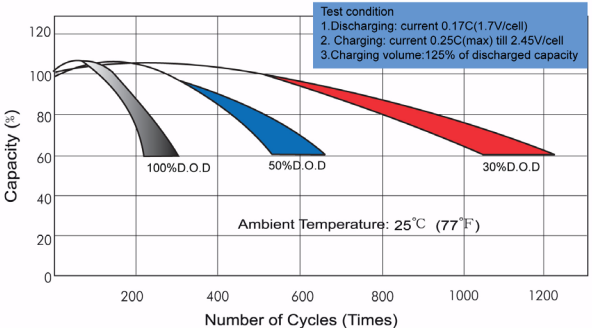

Constant Current Discharge Characteristics (25°C 77°F)

F.V/Time	5MIN	15MIN	30MIN	60MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	190.00	82.50	45.00	27.50	16.90	12.90	8.44	5.58	4.73	2.45
1.67V	188.00	77.10	44.00	26.50	16.30	12.50	8.17	5.53	7.68	2.44
1.70V	186.00	72.60	43.60	25.60	15.90	12.00	7.95	5.44	4.59	2.41
1.75V	170.00	68.00	41.90	24.90	15.30	11.70	7.74	5.36	4.55	2.36
1.80V	153.00	62.20	40.40	23.80	14.70	11.50	7.56	5.27	4.50	2.34



HD12480 12V 48Ah
Sealed Lead Acid AGM Battery